

## elector XL130

### Reaction tank for electrochemical water conditioning

#### Description

The elector XL130 reaction tanks are used for electrochemical treatment of heating and cooling water and are an ideal protection device for closed water systems against water-side corrosion without the addition of chemical corrosion inhibitors. The main function of the elector is an electrochemical treatment of water, which stabilises the pH, scavenges oxygen and purifies the water. This contributes decisively to the quality of the water, allowing corrosion protection of the metals in the system by formation of natural stable layers.

<b>Field of use</b>	Water conditioning in closed water systems, such as heating and cooling systems.
<b>Operating temperature</b>	max. 90°C
<b>Operating pressure</b>	6 bar
<b>Test pressure</b>	10 bar
<b>Tank material</b>	Stainless steel 1.4401 (V4A) / 1.4307 (V2A)),
<b>Insulation</b>	pickled and passivated HT/ARMAFLEX 19 mm, aluminum composite jacket

#### Selection guide

Type designation	System volume* max.	Volume estimated**	Assembly	Article no.
elector XL130	Heatingwater-30m <sup>3</sup> Coolingwater-15m <sup>3</sup>	~18.5 l/kW Underfloor ~12 l/kW Radiators	Floor	14070

\* Without consideration of buffer tanks.

\*\* For old systems with new boilers add approx. 20% to the heating power.



#### Scope of delivery

- elector XL130 reaction tank incl. connection set for installation in bypass.

#### Note for installation

- The device is for installation in bypass, connection should be not less than a 1" tube.
- The nominal flow is to be adjusted to 20 liters per minute.
- Material on site: 1" feed pump with ball valve.  
(eg Wilo Stratos PICO 25/1-4 in control mode differential pressure constant).
- Please refer to the elector user manual.

#### Dimensions

Dimensions in mm		
A	Diameter	366.5
B	Width, incl. connection	383.5
C	Total height	1220
D	Floor - Center inlet	295
E	Floor - Center outlet	895
F	Width incl. Ball valve	465
G	min. distance	600
Inlet-bottom / Outlet-top		1"




#### Matching spare parts

- elector magnesium anode kit suitable for elector XL130, incl. gasket (Article no. 52070)

# elector XL130

## Installation principle including connection set

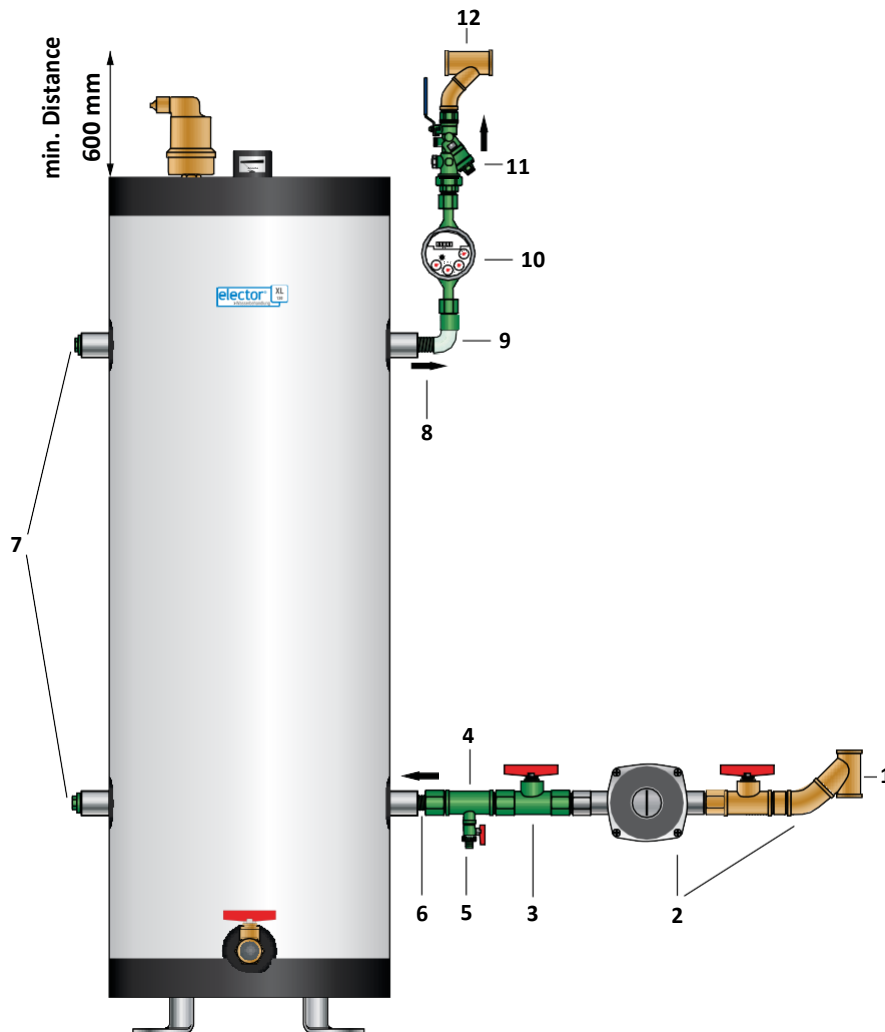

### To be provided on site:

- (1) T-piece or weld on connection for 1" feed line connection
- (2) If applicable 1" feed pump with ball valve (eg Wilo Stratos PICO 25/1-4 in control mode differential pressure constant) forced into line with the main circulation pump.
- (12) T-piece or weld on connection for 1" feed line connection

### Included in the supplied connection kit:

- (3) Ball valve 1"
- (4) T-piece 1" x 1" x 1/2"
- (5) Drain valve 1/2"
- (6) Double nipple 1"
- (7) Blind plug 1"
- (8) Reduction 1" x 3/4"
- (9) Elbow 3/4"
- (10) Water meter 3/4" incl. fitting
- (11) Automatic flow regulator with ball valve

### Connection option

The need for a feed pump (2) depends on the installation site. Please refer to the installation sketches in the user manual.

### Optional supplement

In systems with a high oxygen ingress the installation of a microbubble separator in the flow after the boiler is a useful addition. In case of a large amount of circulating particles we recommend the installation of a depth filtration unit or a magnetic dirt separator.

### Adjust flow rate:

Factory preset 20 liters per minute via automatic flow regulator (11).